

Collection

TAAAC

Article


AA320_23

Description

Wall mounted spout





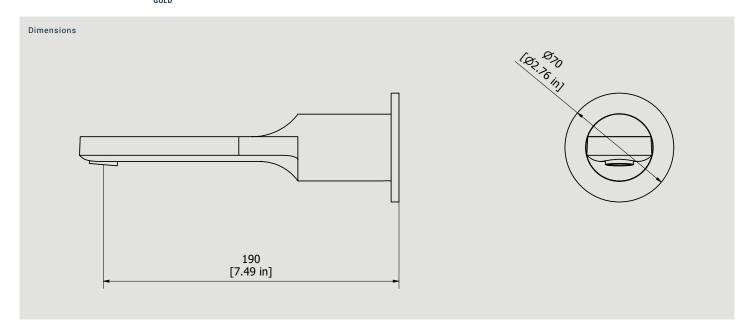

Production

Main body is a single casted pieces

Material

BRASS


According to CuZn35Pb2AL-B (CB752S)

Max Lead content: 1.36%





Parts list				
ITEMS	CODE	DESCRIPTION	FIN	QTÀ
1	CP2310CC-2	Preassembled wall mounted spout	F	1
1.1	CC0002310	Spout Ø43 41.8 L205.5	F	1
1.2	AQ0013390	Perlator NP slim M24x1 1.5 GPM (40.8356.01)	-	1
1.3	AQ0006649	Grubscrew M4x8 cone point	-	1
1.4	AQ0001360	OR 11.91x2.62 NBR 70 SH	-	2
1.5	AQ0010435	Teflon ring Ø19,9 x 5	-	1
1.6	AS0010397	Linking piece for spout G1/2"	G	1
1.7	AQ0004630	OR 17.16x1.78 NBR 70 SH	-	1
2	AC0018089	Ring Ø70 Ø43.5 H5	F	1
3	AQ0009984	OR 43x2 NBR 70 SH	-	1

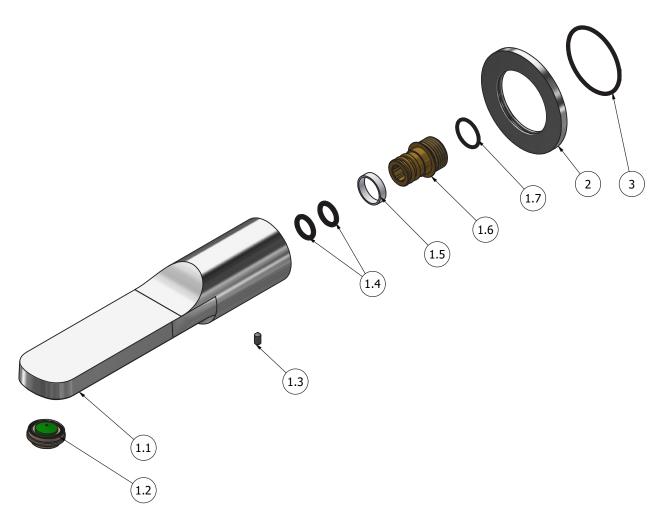





WARRANTY

All IB Rubinetterie SpA products are warrented for 10 years from the date of purchase, for the following cases:

- Defects of casting, porosity and chrome plating.
- Operating defects caused by incorrect fabrication.

The warranty provides for repair or replacement of products with fabrication defects recognized by our technical office. There is no other type of compensation anche the merchandise must be returned FOB our werehouse. The warranty only cover surface defects (scartches, dings, etc.) on fitting that have not been installed and used, returned in its original packaging with all components. O-ring, gasket seals and components subject to wear proportional to use are warranted for 2 years.

The warranty is void in the following cases:

Error installing and putting the product into service.

Deterioration of finisched surfaces due to use of cleaning products containing acids or abrasive substances. Deterioration of surface with finishes other than chrome plating. Their durability is, in fact, dependent on the user's care and gentleness of use.

Deterioration of the fitting due incorrect installation.

Improper repairs and maintenance performed without the company's prior authorization.

The warranty from IB Rubinetterie SpA is not renewable.

Cleaning

We recommanded cleaning the finish surfaces with water and soap, using a soft cloth. Do not use detergents that cointain hydrochloric acid or abrasive substances.

